

MYS-503N4

HOSPITAL BED WITH 3 CRANKS



Meyosis®

www.meyosis.com

MYS-503N4

GENERAL SPECIFICATIONS

- Back and leg movements, height adjustment, and back-leg movement (vascular position) are controlled by 3 manual cranks.
- There is a dual automatic regression feature that minimizes the pressure on the patient's abdominal area and the friction that may occur in the pelvic area
- Easily removable polypropylene (PP) head and foot panels.
- Foldable aluminum side rails.
- 4-piece easy-to-clean ABS plastic lying surface.
- Electrostatically powder-coated metal parts with an open bottom chassis.
- Ø125 mm diameter, 360° rotating castors with cross brakes.
- Accessory sockets at all four corners of the bed, including one height-adjustable IV pole.
- Drainage hooks and belt hooks on both sides of the bed.
- Protective plastic bumpers.
- Antibacterial and liquid-proof zippered mattress with 26-density foam.



OPERATION ANGLES



Vascular
0° - 30°



Knee Movement



Back Movement
0° - 70°




Leg Movement
0° - 30°



Height

DIMENSIONS

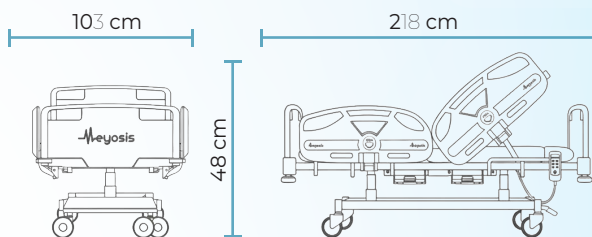

TECHNICAL SPECIFICATIONS



100 kg



Max. 250 kg



Manual